



FEATURES:

- Recessed mounted downlight

BODY

- Stainless steel finish, 316 grade
- Silicon gasket for water, dustproof


Diffuser

- Frosted / Clear glass


Others

- ✦ Elegant chic appearance
- ✦ Green, energy efficient
- ✦ Simple maintenance, easy installation
- ✦ 1-10V Dimmable
- ✦ European standard of EN 60598


Available:




Model No.	B90500	B90501	B90502	B90503	B90504
Power	1W HP I FD	1W HP I FD	1W HP I FD	10W HP I FD	15W HP I FD
Voltage	1/UV-240V	170V-240V	170V-240V	170V-240V	170V-240V
Power Factor	>90	>90	>90	>90	>90
Color Temp.	2700 - 6500K	2700 - 6500K	2700 - 6500K	2700 - 6500K	2700 - 6500K
CRI	>80	>80	>80	>80	>80
Luminous Flux	70LM	70LM	70LM	70LM	1130LM
Temp. in Working	20°C +50°C	20°C +50°C	20°C +50°C	20°C +50°C	20°C +50°C
Dimension	28x20mm	28x20mm	28x20mm	105x58mm	135x80mm
Protection Grade	IP44	IP44	IP44	IP44	IP44
Life Span				35000	45000 hrs




B90500




B90501



B90502




B90503

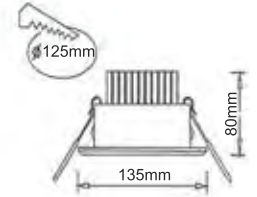


B90504


LUMINOUS INTENSITY DISTRIBUTION

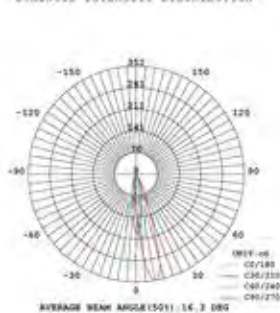

LUMINOUS INTENSITY DISTRIBUTION

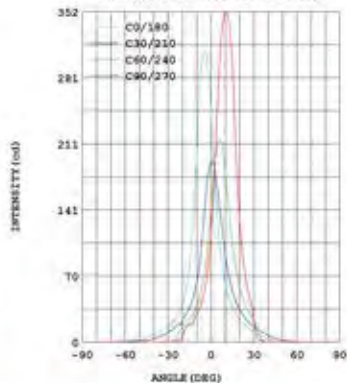

LUMINOUS INTENSITY DISTRIBUTION

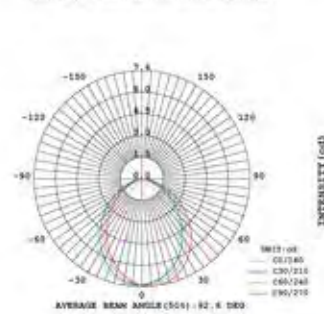

LUMINOUS INTENSITY DISTRIBUTION

