



FEATURES:

- Surface mounted LED wall washer

Body

- Made of extruded aluminium (Aluminium finish).
- Powder coated finish (Option)
- Black and White

Diffuser

- Tempered glass diffuser.

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient HP LED chip
LED: Epistar, Bridgelux, Cree, Samsung etc.
(as per choice)
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior & external lighting
- ◆ European standard of EN 60598

Model No.	LD-18-02A	LD-18-02B	LD-18-02C	LD-18-02D	LD-18-02E
Type of LED	12LED	12LED	18LED	18LED	24LED
Power	1Wx12LED = 12W	2Wx12LED = 24W	1Wx18LED = 18W	2Wx18LED = 36W	2Wx24LED = 48W
Voltage	DC-12V / 24V	DC-12V / 24V	DC-12V / 24V	DC-12V / 24V	DC-12V / 24V
Color Temp.	3500 - 4000K	3500 - 4000K	3500 - 4000K	3500 - 4000K	3500 - 4000K
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C
Dimension	1000x48x65mm	1000x48x65mm	1000x48x65mm	1000x48x65mm	1000x48x65mm
Protection Grade	IP67	IP67	IP67	IP67	IP67
Life Span	35000-45000Hrs	35000-45000Hrs	35000-45000Hrs	35000-45000Hrs	35000-45000Hrs

Custom made wattage and size available on request / 220-240V Input power (Buitin Drive) Available on request.

Dimming Options:

DALI & DSI Dimming, 10BLF ~100 BLF Dimming

Available:



IP67

IK08


EN EC

SUPERINTENDENCIA DE ELECTRICIDAD Y COMBUSTIBLES

CE NOM



LD-18-02

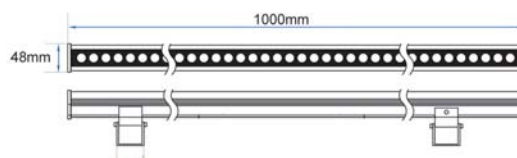

LD-18-02+AGL

Anti-glare Louvre

