



Description

- Heavy duty LED Floodlight
- Made of die-cast aluminium
- Powder coated surface coating.
- Tempered glass diffuser

FEATURES:

- Aluminium heat zing
- Multi angle adjustable bracket
- High intensity lighting LED chip
- Remote mounting drive

Others

- ◆ High Corrosion resistant capability
- ◆ Epistar / Osram LED
- ◆ Working Temperature: 35~50°C
- ◆ Ideal for external lighting
- ◆ European standard of EN 60598



JRF5-48



JRF5-96



JRF5-252



JRF5-66 / JRF5-86



JRF5-108 / JRF5-126




JRF5-48




Model	JRF5-66	JRF5-86	JRF5-108	JRF5-126	JRF5-48
LED Quantity	66pcs	86pcs	108pcs	126pcs	48pcs
Rated Power	158W	200W	250W	286W	302W
Color Temp	3000 - 6500K, RGB	3000 - 6500K, RGB	3000 - 6500K, RGB	3000 - 6500K, RGB	3000 - 6500K, RGB
Luminous Flux	11227LM	14000LM	17500LM	19417LM	12170LM
Input Voltage	AC100-277V	AC100-277V	AC100-277V	AC100-277V	AC100-277V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
CRI	CRI ≥ 80	CRI ≥ 80	CRI ≥ 80	CRI ≥ 80	CRI ≥ 80
Control Mode	CC/DMX512	CC/DMX512	CC/DMX512	CC/DMX512	CC/DMX512
Beam Angle	10° / 25° / 40° / 60°	10° / 25° / 40° / 60°	10° / 25° / 40° / 60°	10° / 25° / 40° / 60°	10° / 25° / 40° / 60°
Work Temp.	~35 - 50°C	~35 - 50°C	~35 - 50°C	~35 - 50°C	~35 - 50°C
Humidity of Work	10-90%	10-90%	10-90%	10-90%	10-90%
Life Span	70000Hrs	70000Hrs	70000Hrs	70000Hrs	70000Hrs
Protection Grade	IP66	IP66	IP66	IP66	IP66
Net Weight	14.2Kg / 16.5Kg	14.2Kg / 16.5Kg	18.1Kg / 17.5Kg	18.1Kg / 17.5Kg	15.5Kg / 18Kg
Gross Weight	16.1Kg / 18.4Kg	16.1Kg / 18.4Kg	20.9Kg / 19.4Kg	20.9Kg / 19.4Kg	17.4Kg / 19.9Kg


JRF5-108 / JRF5-126

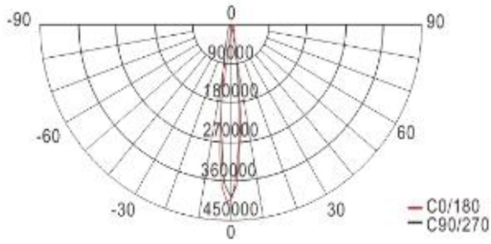


20m	602.1lx	296 cm
40m	150.5lx	593 cm
60m	66.90lx	889 cm
80m	37.63lx	1185 cm
100m	24.09lx	1481 cm
H	Eavg	Diameter

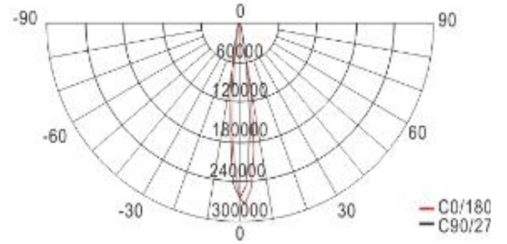

20m	436.6lx	533 cm
40m	109.1lx	1065 cm
60m	48.51lx	1598 cm
80m	27.29lx	2131 cm
100m	17.46lx	2664 cm
H	Eavg	Diameter

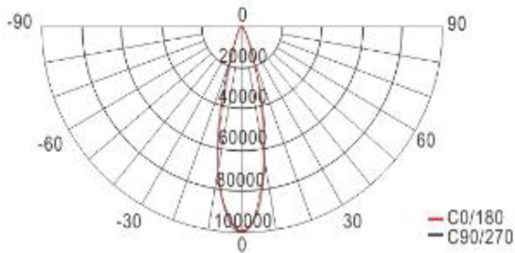


20m	163.3lx	931 cm
40m	40.82lx	1861 cm
60m	40.82lx	2792 cm
80m	18.14lx	3722 cm
100m	10.20lx	4653 cm
H	Eavg	Diameter

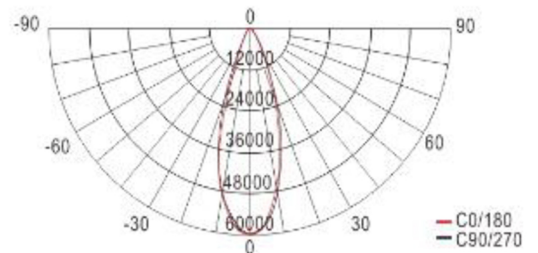


20m	99.62lx	1266 cm
40m	24.91lx	2532 cm
60m	11.07lx	3798 cm
80m	6.226lx	5064 cm
100m	3.985lx	6330 cm
H	Eavg	Diameter

JRF5-48

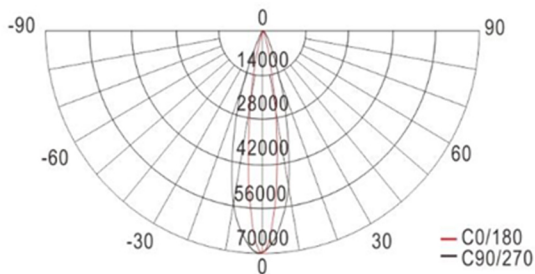

20m	133.9lx	555 cm
40m	33.48lx	1110 cm
60m	14.88lx	1666 cm
80m	8.370lx	2222 cm
100m	5.357lx	2777 cm
H	Eavg	Diameter

JRF5-66 / JRF5-86

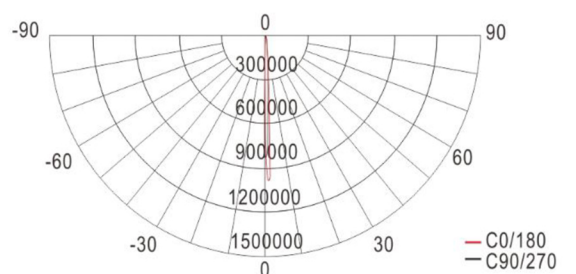

20m	1385lx	160 cm
40m	346.2lx	319 cm
60m	153.9lx	479 cm
80m	86.54lx	638 cm
100m	55.39lx	798 cm
H	Eavg	Diameter