



FEATURES:

- Recessed mounted downlight
- COB LED chip by CREE-USA
- SMD LED chip by Samsung / Epistar

Body

- Made of die-cast aluminium with surface powder coated.
- Chrome, White finish

Diffuser

- Fiber / Nano (SMD LED version)
- Tempered glass (COB LED (version))

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB / SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598


Available:	3000K	3500K	4000K	4500K	5000 - 5500K	6000 - 6500K
------------	-------	-------	-------	-------	--------------	--------------



B-DL-02



Installation

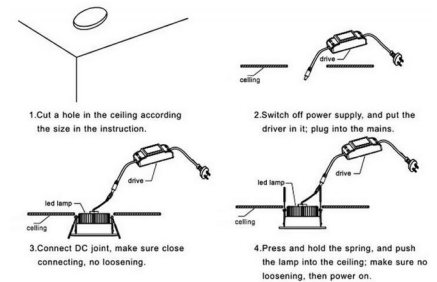

BDL-02-5/7/9/10	BDL-02-12/15/20	BDL-02-20/25
Ø 80-85mm	Ø 90-95mm	Ø 115-140mm

Model No.	BDL-02-5	BDL-02-7	BDL-02-9	BDL-02-10	BDL-02-12	BDL-02-15	BDL-02-20	BDL-02-25
Power	5W LED	7W LED	9W LED	10W LED	12W LED	15W LED	20W LED	25W LED
LED Type	COB	COB	COB	COB	COB	COB	COB	COB
Dimension	Dia:95xH:51mm	Dia:95xH:51mm	Dia:95xH:51mm	Dia:95xH:51mm	Dia:115xH:55mm	Dia:115xH:55mm	Dia:115xH:55mm	Dia:155xH:67mm
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Luminous Flux	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C
Angle	10/30°	10/30°	10/30°	10/30°	10/30°	10/30°	10/30°	10/30°
Life Span	50000Hrs							