

FEATURES:

- Recessed mounted LED downlight

Body

- Made of aluminium, Uv-stabilized, powder coated
- White, Black and Silver finish.

Reflector

- Anodized aluminium

Diffuser

- Clear safety glass

Others


- ◆ Aluminium structured heat sink for better heat dissipation
- ◆ High efficient CREE LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598

BR-DL033-(**)



Model No.	BR-DL033-5W	BR-DL033-8W	BR-DL033-10W	BR-DL033-12W
Power	5W LED	8W LED	10W LED	12W LED
Type of LED	CREE	CREE	CREE	CREE
Dimension	Dia:90xH:113mm	Dia:90xH:113mm	Dia:90xH:113mm	Dia:90xH:113mm
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Power Factor	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80
Luminous Flux	90LM/W	90LM/W	90LM/W	90LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Angle	15/24/38°	15/24/38°	15/24/38°	15/24/38°
Protection	IP44	IP44	IP44	IP44
Life Span	50000Hrs			

CUSTOMIZED DESIGN

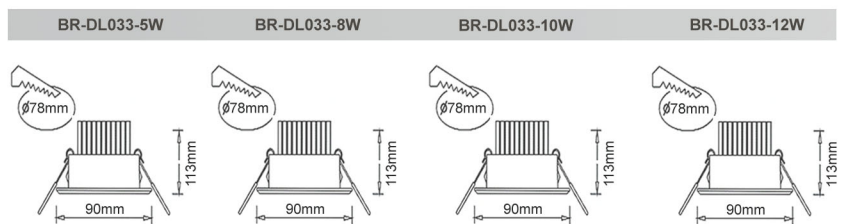

ORDER CODE: (**)

C01 Matt Silver	C02 Oval Slot	C03 Black Groove	C04 IP44 Glass Front	C05 Narrow Opening
C06 Silver Mirror	C07 Golden Mirror	C08 White Groove	C09 Narrow Black Interior	C10 Wall Washer