



FEATURES:

- Recessed floor mounted outdoor LED Panel light.

Body

- Made of Die-cast aluminium
- Stainless steel frame 316 grade

Diffuser


- Tempered safety glass

Others

- ◆ Waterproof double silicone seal
- ◆ UV resistant
- ◆ Bridgelux / CREE LED
- ◆ PVC or aluminium mounting sleeve
- ◆ Silicon gasket
- ◆ DALI & DSI Dimming 1-10 V Dimming on request
- ◆ European standard of EN 60598




BRP4007

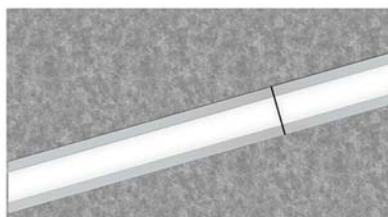

Mask

High transmittance
Exquisite appearance



Power Cord

Full copper core
Easy to bend
waterproof
cold-resistant



Stainless steel screw

Strong metal
Easy operation



Stainless Steel Frame

Stainless steel cover
Aluminium housing



LED chip

Bridgelux/ Epistar
High luminous
Long lifespan

Power Cable:
H05RN-F 2x1.0mm L=0.5m
(for Single color)
H05RN-F 4x0.75mm L=0.5m
(for RGB)

Model No.	BRP4007-5	BRP4007-6/9	BRP4007-12	BRP4007-24/26
Power	1x5W LED 2x5W LED	1x6W / 1x9W LED 2x6W / 2x9W LED	1x12W LED 2x12W LED	1x24W / 1x26W LED 2x24W / 2x26W LED
Type of LED	Bridgelux / CREE	Bridgelux / CREE	Bridgelux / CREE	Bridgelux / CREE
Dimension	L200xW80xH75mm	L300xW90xH90mm	L500xW90xH90mm	L1000xW90xH90mm
Voltage	110-240V	110-240V	110-240V	110-240V
Power Factor	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K RGB	2700K - 6500K RGB	2700K - 6500K RGB	2700K - 6500K RGB
Control Mode	DMX-512	DMX-512	DMX-512	DMX-512
CRI	≥80	≥80	≥80	≥80
Luminous Flux	90LM/W	90LM/W	90LM/W	90LM/W
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C
Angle	10 - 120°	10 - 120°	10 - 120°	10 - 120°
Protection	IP67	IP67	IP67	IP67
Life Span			50000Hrs	