

# BRHBL(\*\*)-G4



## Better Solutions for a LED Highbay Light

### FEATURES:

- Heavy duty UFO highbay luminaire for multi purpose external use

### Body

- Made of aluminium polyester powder coated, solid heat sink.
- Double structured housing with built in LED drive
- Impact resistant body

### Others

- ◆ Philips SMD LED, Lumileds replacable module
- ◆ Silicon seal gasket for water and dustproof
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for industrial and large scale warehouse
- ◆ European standard of EN 60598

### Options

#### Power

- MEANWELL DRIVER
- HBG Series B: Dimmable 1-10V
- HBG Series AB
- ELG Series A: Standard
- ELG Series B: Dimmable 0-10V
- ELG Series DA: Dimmable DALI



IP65 Water-proof



Easy Installation



AC100-277V 50/60Hz




140LM/W




Model No.	Power	Lumen	LED Type	CRI	Beam Angle	Color	Life Span	Weight
BRHBL80W-G4	80W	11200Lm	LUMILEDS 3030	> 80	60 / 90 / 120°	3000K - 6500K	50000Hrs	3.50kg
BRHBL100W-G4	100W	14000Lm	LUMILEDS 3030	>80	60 / 90 / 120°	3000K - 6500K	50000Hrs	3.50kg
BRHBL120W-G4	120W	16800Lm	LUMILEDS 3030	> 80	60 / 90 / 120°	3000K - 6500K	50000Hrs	3.50kg
BRHBL150W-G4	150W	21000Lm	LUMILEDS 3030	>80	60 / 90 / 120°	3000K - 6500K	50000Hrs	3.50kg
BRHBL200W-G4	200W	28000Lm	LUMILEDS 3030	> 80	60 / 90 / 120°	3000K - 6500K	50000Hrs	5.50kg
BRHBL240W-G4	240W	33600Lm	LUMILEDS 3030	>80	60 / 90 / 120°	3000K - 6500K	50000Hrs	5.50kg

### Dimensions (mm)

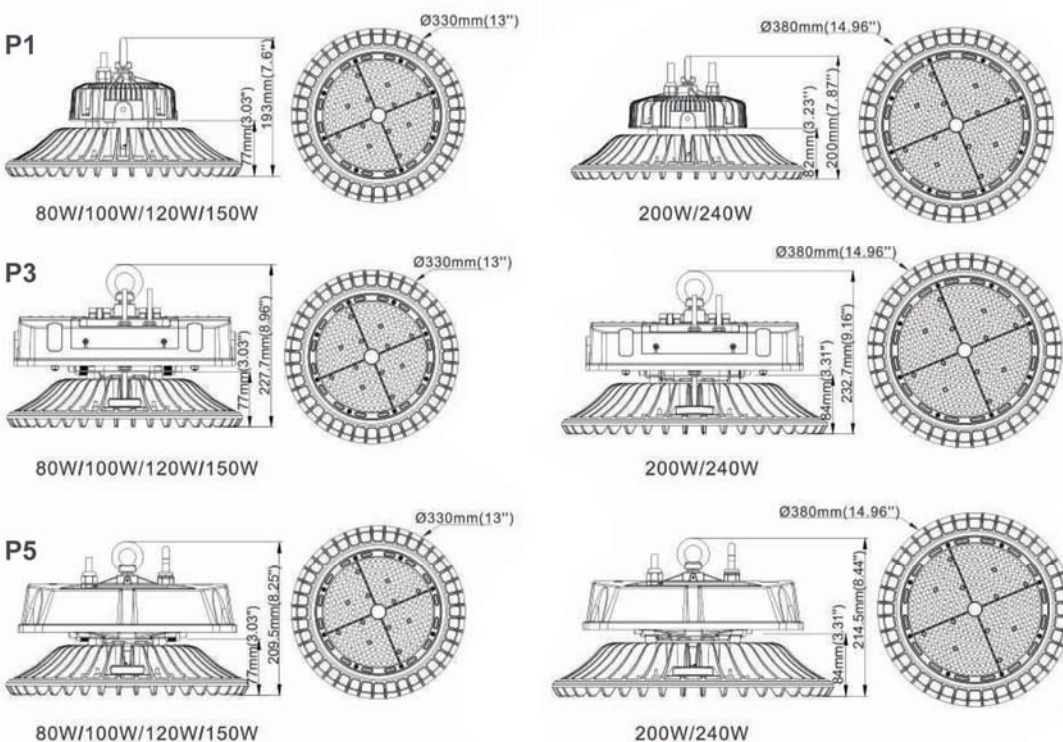

### Photometric Data

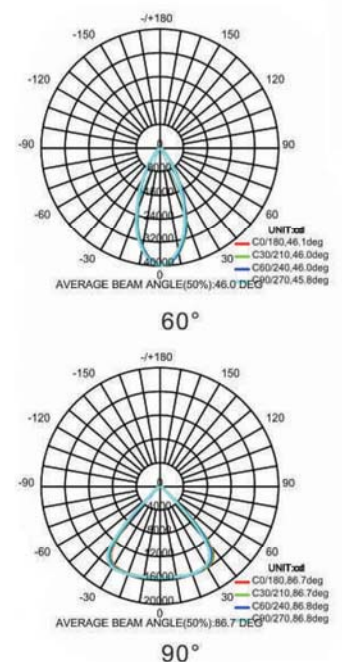

# BRHBL(\*\*)-G4



## Model Options

P1



P3



P5



P2



P4




P6




## Installation & Use

### P1 Mounting Ring (Standard)

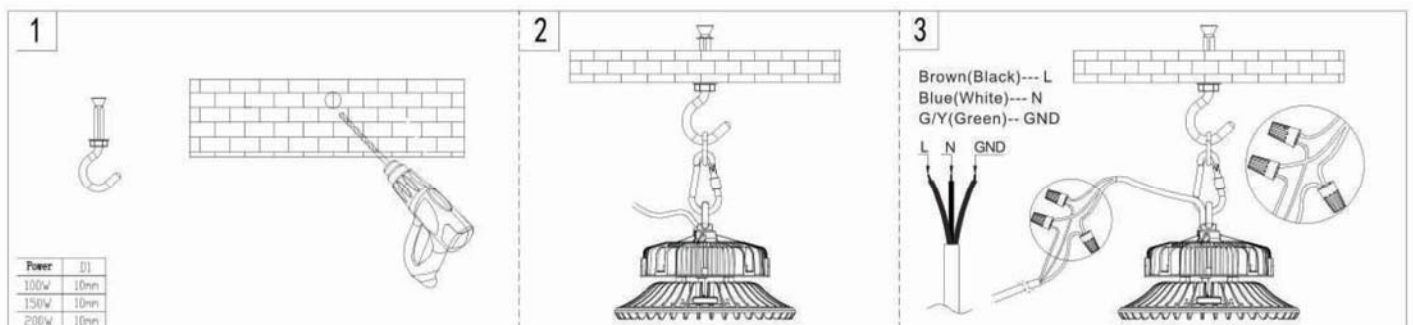


### P2 Mounting Bracket A

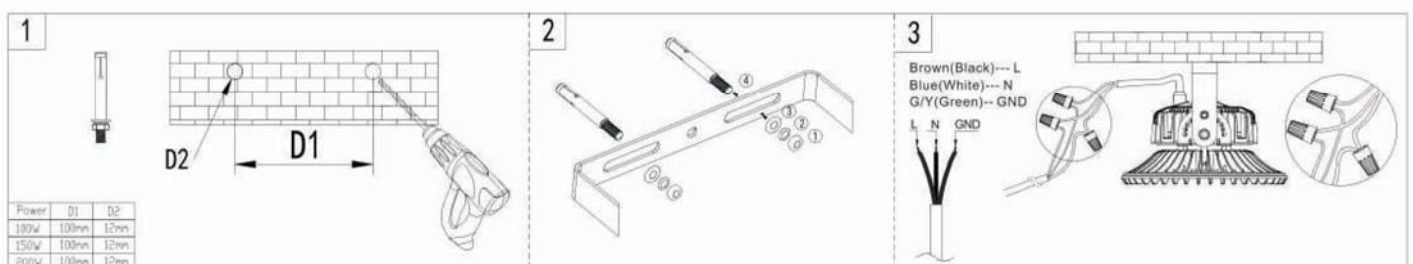




# BRHBL(\*\*)-G4


## P3 Mounting Ring

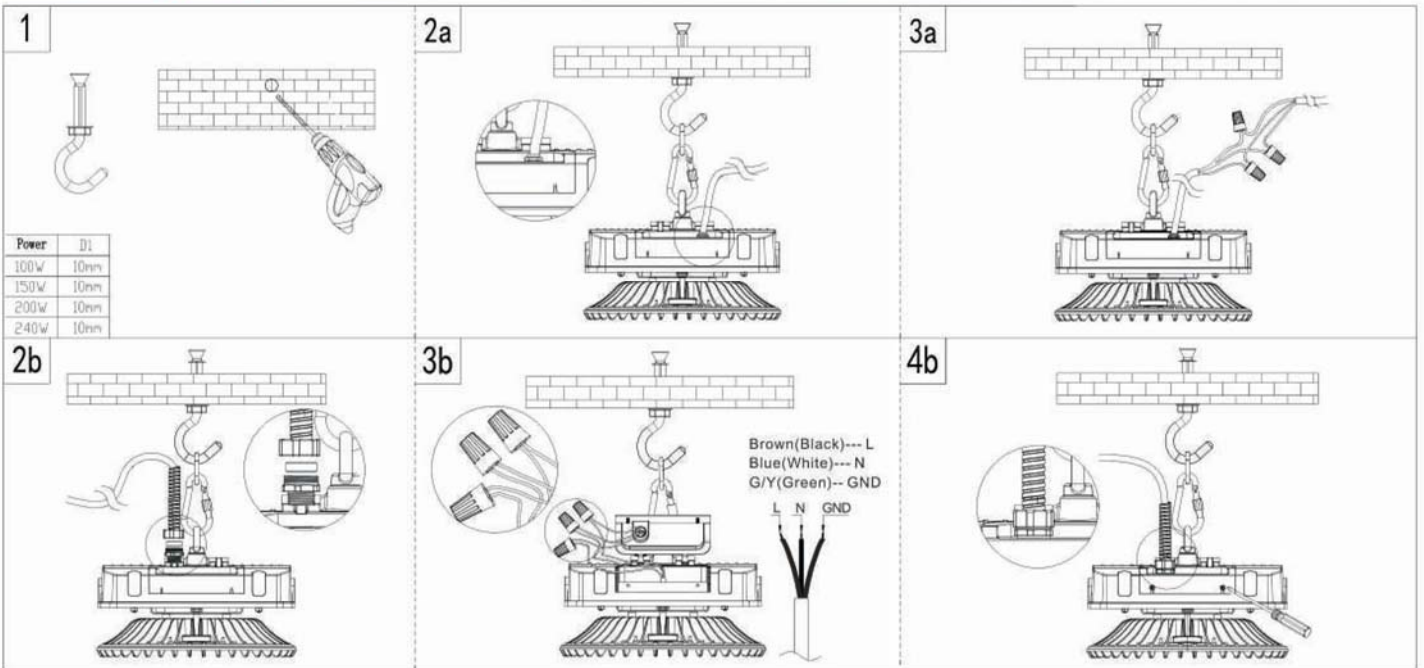

## P4 Mounting Bracket B

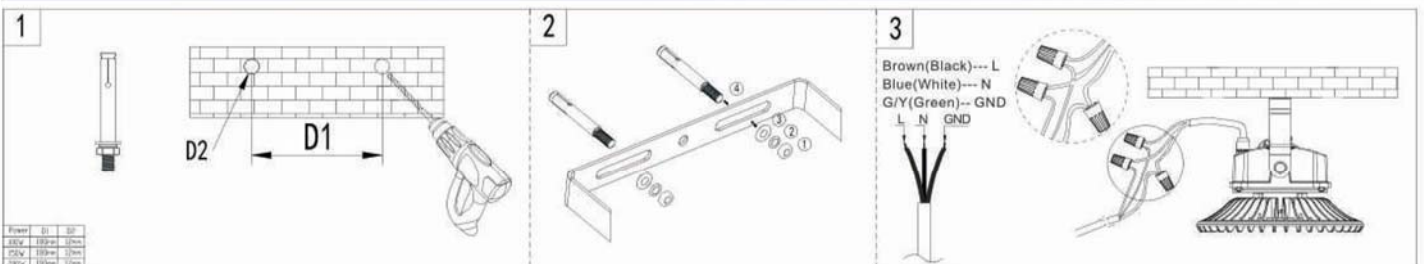

## P5 Mounting Ring

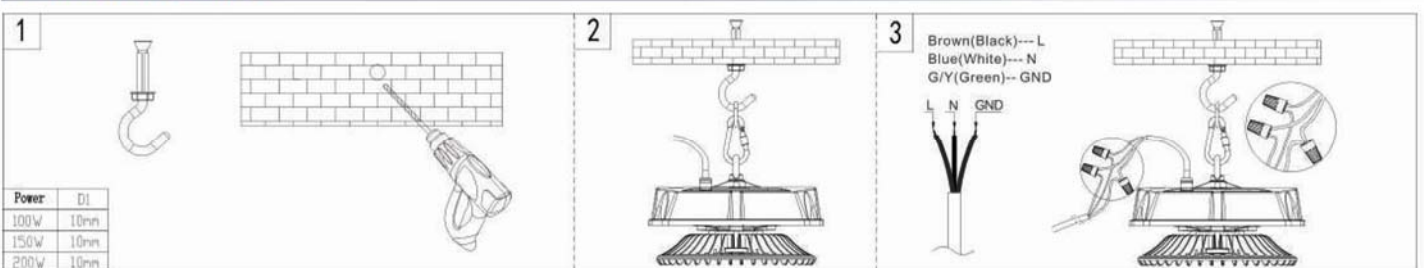

## P6 Mounting Bracket C

