



### FEATURES:

- Surface mounted LED Shop light

#### Body

- Made of anodized aluminium, Uv-stabilized, powder coated
- White, Black and Silver finish.
- PVC end cap
- Stainless steel mounting bracket

#### Reflector

- Anodized aluminium

#### Diffuser

- Opal, Frosted and Clear Diffuser

#### Others

- ◆ Aluminium structured heat sink for better heat dissipation
- ◆ High efficient SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Indoor areas
- ◆ European standard of EN 60598


#### P1500-50W



Model No.	P900-30W	P1200-40W	P1200-50W	P1500-50W
Power	30W LED	40W LED	50W LED	50W LED
Type of LED	SMD 2835	SMD 2835	SMD 2835	SMD 2835
Dimension	890x93x60mm	1195x93x60mm	1195x93x60mm	1490x93x60mm
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Power Factor	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Angle	120°	120°	120°	120°
Protection	IP40	IP40	IP40	IP40
Life Span	50000Hrs			



#### Installation

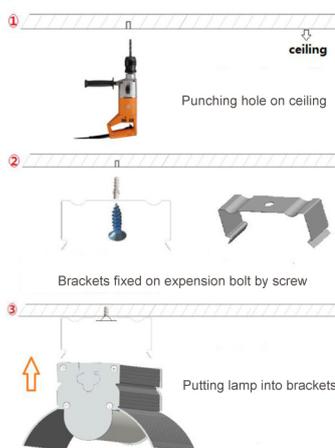

#### Photometric Data

