



FEATURES:

- Surface mounted RGB / Normal LED Wall Washer

Body

- Made of extruded aluminium (Aluminium finish).
- Powder coated finish (option), Black, White, Grey and Graphite

Diffuser

- Tempered glass

Others

- ◆ Aluminium structured heat sink for better heat dissipation.
- ◆ High efficient HP LED chip
LED: Osram, Bridgelux, Cree etc.
(as per choice)
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Outdoor lighting
- ◆ European standard of EN 60598

Available:



IP66



IK10

CE NOM

SUPERINTENDENCIA DE ELECTRICIDAD Y COMUNITABLES

EM EC

BRW7075-(**)

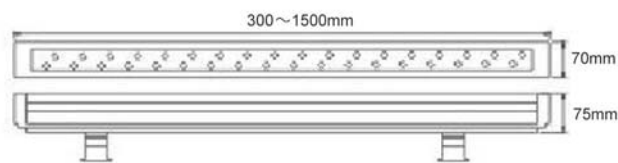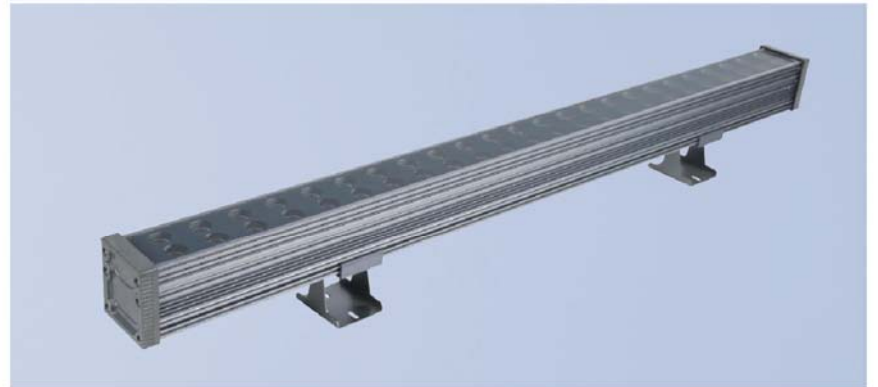



Model No.	BRW3020-(**)	BRW3528-(**)	BRW5038-(**)	BRW4030-(**)	BRW7075-(**)
Power	15W / 18W LED	18W / 24W LED	18W / 24W / 36W LED	18W / 24W LED	10~60W LED
Type of LED	Osram / Cree / Bridgelux	Osram / Cree / Bridgelux	Osram / Cree / Bridgelux	Osram / Cree / Bridgelux	Osram / Cree / Bridgelux
Dimension	300 ~ 1500x30x20mm	300 ~ 1500x35x28mm	300 ~ 1500x50x38mm	300 ~ 1500x40x30mm	300 ~ 1500x70x75mm
Voltage	AC85-265V / DC12V-24V	AC85-265V / DC12V-24V	AC85-265V / DC12V-24V	AC85-265V / DC12V-24V	AC85-265V / DC12V-24V
Color Temp.	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
	RGB	RGB	RGB	RGB	RGB
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	5 ~ 120° / 10°45' / 10°60°	5 ~ 120° / 10°45' / 10°60°	5 ~ 120° / 10°45' / 10°60°	5 ~ 120° / 10°45' / 10°60°	5 ~ 120° / 10°45' / 10°60°
Control Mode	DMX512 / NORMAL	DMX512 / NORMAL	DMX512 / NORMAL	DMX512 / NORMAL	DMX512 / NORMAL
Life Span	50000Hrs	50000Hrs	50000Hrs	50000Hrs	50000Hrs

**Wattage: 10W ~ 72W (Depends on the size)

**Size: 300 ~ 1500mm (Depends on the requirements)



BRW3020

BRW3528

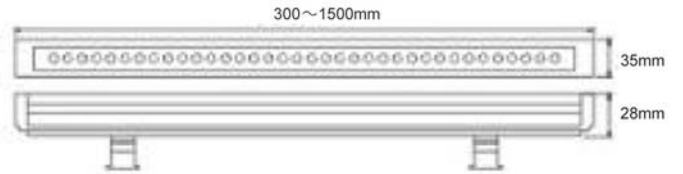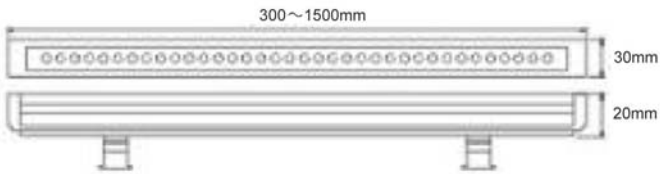

BRW5038-()**

BRW4030

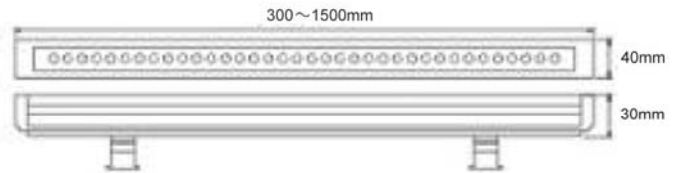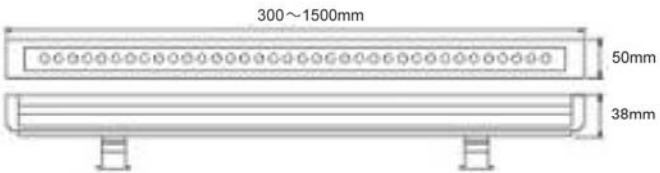

Connection Diagram

