



### FEATURES:

- Super Narrow mini Projector

#### Body

- Made of extruded aluminium with powder coated finish (Black, White, Silver, Grey, Graphite)
- Adjustable bracket
- Protection: IP66
- Aluminium structured heat sink

#### Diffuser



- Nano optic narrow beam

#### Others

- ◆ 3D heat flow channel design, more efficient and faster to heat dissipate.
- ◆ High efficient CREE MXL chip
- ◆ High quality patented lens with good performance
- ◆ 25M effective distance
- ◆ Energy saving 80% to replace metalhalide light
- ◆ Heat resistant and solid conduct wiring
- ◆ Unique optic design creates good performance light effort.
- ◆ Easy to install and use
- ◆ Ideal for Outdoor Facade lighting
- ◆ European standard of EN 60598



### DL100-NARROW

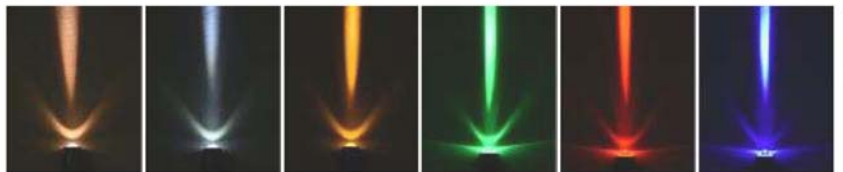

Model No.	DL100-NARROW	DL100-NARROW
Power	5W LED	10W LED
Type of LED	CREE	CREE
Dimension	Dia:100xH:160mm	Dia:100xH:160mm
Voltage	AC160-245V	AC160-245V
Power Factor	>0.96	>0.96
Color Temp.	2700K-6500K / RGB	2700K-6500K / RGB
CRI	≥80	≥80
Luminous Flux	100LM/W	100LM/W
Temp. in Working	-25°C +45°C	-25°C +45°C
Angle	10/15/20°	10/15/20°
Driver	Isolated	Isolated
Life Span		50000Hrs

