



FEATURES:

- Recessed mounted downlight
- COB LED chip by CREE / PHILIPS

Body

- Made of die-cast aluminium with polyester powder coated.
- White, Silver, Black finish

Diffuser

- Tempered glass, thermal shock resistant

Reflector


- Anodized aluminium with glare control

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598



Photometric

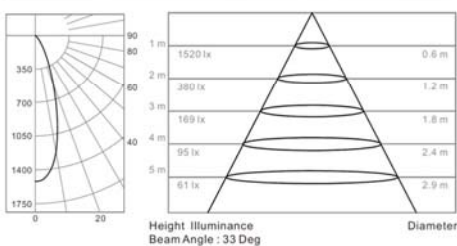

Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K



SW-BT030Q-()**



SW-BT040Q-()**



Model No.	SW-BT030Q-(**) / SW-BT040Q-(**)			
Power	20W / 2x20W LED	25W / 2x25W LED	30W / 2x30W LED	35W / 2x35W LED
LED Type	CREE - PHILIPS	CREE / PHILIPS	CREE / PHILIPS	CREE / PHILIPS
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Protection	IP44	IP44	IP44	IP44
Dimension	L175xW175xH130mm / L330xW175xH167mm			
Life Span	50000Hrs			