



### FEATURES:

- Surface mounted mini LED Floodlight

#### Body

- Made of extruded aluminium  
- Electro powder coated Grey / Black finish


#### Diffuser / Reflector

- Tempered safety glass  
- Anodized aluminium narrow beam reflector

#### Others

- ◆ Aluminium structured heat sink
- ◆ High efficient CREE LED chip
- ◆ SS waterproof gland
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for external use
- ◆ European standard of EN 60598


#### Color:

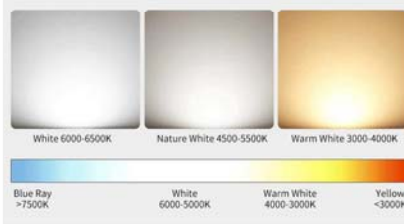

### BT03B



### DIMENSION

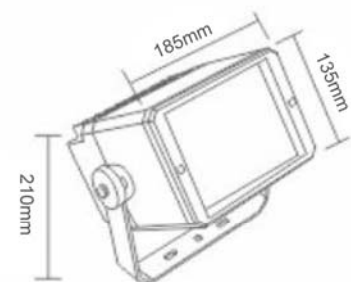

Adjustable mounting bracket



Heat sink structure

Model No.	BT03B-25W	BT03B-35W	BT03B-50W
Power	25W LED	35W LED	50W LED
LED Type	CREE	CREE	CREE
Dimension	185x135x210mm	185x135x210mm	185x135x210mm
Voltage	DC24V / AC220V	DC24V / AC220V	DC24V / AC220V
Power Factor	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	3/5/8/10/15°	3/5/8/10/15°	3/5/8/10/15°
Life Span		50000Hrs	

Customade wattage on request

