



### FEATURES:

- Recessed mounted downlight
- COB LED chip by CREE / EPISTAR

### Body

- Made of die-cast aluminium with polyester powder coated.
- White, Silver, Black finish

### Diffuser

- Tempered glass, thermal shock resistant

### Reflector


- Anodized aluminium with glare control

### Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598



### Beam Angle

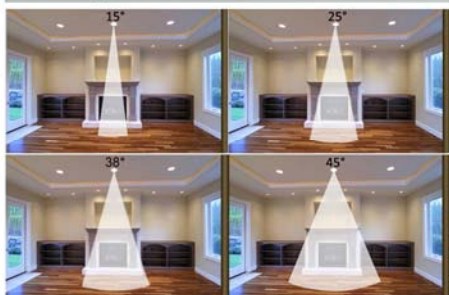

Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K




### SW-TD0201F




### SW-TD0202F



SW-TD0201F



SW-TD0202F



Model No.	SW-TD0201F / SW-TD0202F			
Power	18W / 2x18W LED	20W / 2x20W LED	25W / 2x25W LED	30W / 2x30W LED
LED Type	CREE - EPISTAR	CREE / EPISTAR	CREE / EPISTAR	CREE / EPISTAR
Voltage	AC100V-265V	AC100V-265V	AC100V-265V	AC100V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	15 / 25 / 38 / 45	15 / 25 / 38 / 45	15 / 25 / 38 / 45	15 / 25 / 38 / 45
Temp. in Working	-30 C +50 C	-30 C +50 C	-30 C +50 C	-30 C +50 C
Protection	IP44	IP44	IP44	IP44
Drive	Electronic	Electronic	Electronic	Electronic
Life Span	50000Hrs			