



FEATURES:

- Recessed mounted trimless downlight
- COB LED chip by CREE

Body

- Made of die-cast aluminium with polyester powder coated.
- White, Silver, Black finish

Diffuser

- Tempered glass, thermal shock resistant

Reflector

- Anodized aluminium adjustable reflector

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598


Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K






TM-S401R



Photometric

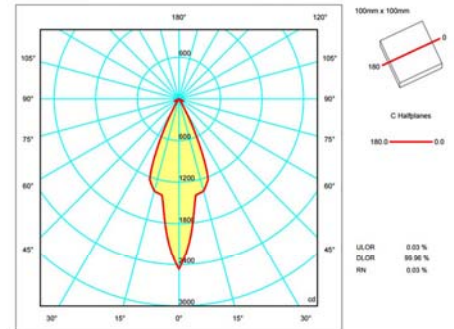

7W 10W 15W



Model No.	TM-S401R		
Power	7W LED	10W LED	15W LED
LED Type	CREE	CREE	CREE
Dimension	Dia: 80xH:95mm	Dia: 80xH:110mm	Dia: 80xH:135mm
Voltage	AC85V-265V	AC285V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W
Beam Angle	15 / 24 / 28°	15 / 24 / 28°	15 / 24 / 28°
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C
Protection	IP44	IP44	IP44
Drive	Philips	Philips	Philips
Life Span	50000Hrs		

Installation

