



FEATURES:

- Recessed mounted LED Downlight
- COB LED chip by CREE

Body

- Made of die-cast aluminium with surface powder coated epoxy painting.
- White, Black, Chrome finish

Diffuser

- Tempered glass

Reflector

- Anodized aluminium assymetrical reflector

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dali / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598


| | | | | | | |
|------------|-------|-------|-------|-------|--------------|--------------|
| Available: | 3000K | 3500K | 4000K | 4500K | 5000 - 5500K | 6000 - 6500K |
|------------|-------|-------|-------|-------|--------------|--------------|



TM-BH6500



Asymmetrical Downlight

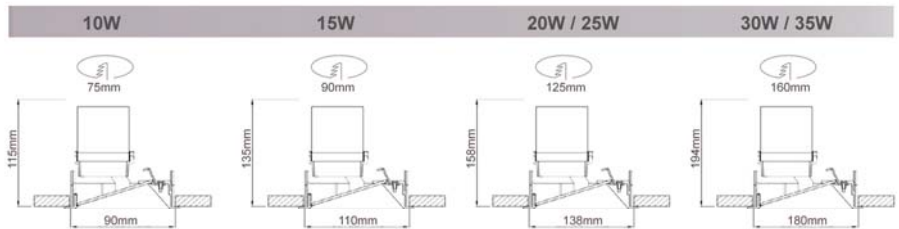

| Model No. | TM-BH6500 | | | | | |
|------------------|--|-----------------|-----------------|-----------------|-----------------|-----------------|
| | 10W LED | 15W LED | 20W LED | 25W LED | 30W LED | 35W LED |
| LED Type | CREE | CREE | CREE | CREE | CREE | CREE |
| Dimension | Dia:90xH:115mm | Dia:110xH:135mm | Dia:138xH:158mm | Dia:138xH:158mm | Dia:180xH:194mm | Dia:180xH:194mm |
| Voltage | AC85V-265V | AC85V-265V | AC85V-265V | AC85V-265V | AC85V-265V | AC85V-265V |
| Power Factor | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 |
| Color Temp. | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K |
| CRI | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Luminous Flux | 100LM/W | 100LM/W | 100LM/W | 100LM/W | 100LM/W | 100LM/W |
| Temp. in Working | -30°C +50°C | -30°C +50°C | -30°C +50°C | -30°C +50°C | -30°C +50°C | -30°C +50°C |
| Beam Angle | 15/24/28° | 15/24/28° | 15/24/28° | 15/24/28° | 15/24/28° | 15/24/28° |
| Protection | IP44 | IP44 | IP44 | IP44 | IP44 | IP44 |
| Driver | Philips | Philips | Philips | Philips | Philips | Philips |
| Dimmable | TRIAC/0-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim) | | | | | |
| Life Span | 50000Hrs | | | | | |