



FEATURES:

- Recessed mounted downlight
- COB LED chip by Epistar

Body

- Made of die-cast aluminium with surface powder coated.
- Chrome, White finish

Diffuser

- Tempered glass, thermal shock resistant

Reflector

- Anodized aluminium with glare control


Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598

Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K




SW-DL008A

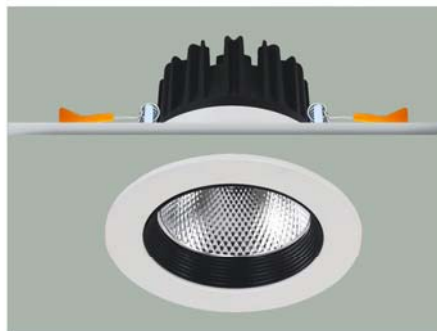

SW-DL008B



3W / 5W 7W / 10W / 12W 15W / 20W 25W / 30W

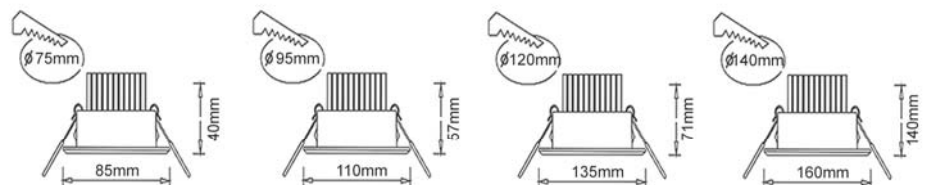

Model No.	SW-DL008A / SW-DL008B									
Power	3W LED	5W LED	7W LED	10W LED	12W LED	15W LED	20W LED	25W LED	30W LED	
LED Type	COB	COB	COB	COB	COB	COB	COB	COB	COB	COB
Dimension	Dia:85xH:40mm	Dia:85xH:40mm	Dia:110xH:57mm	Dia:110xH:57mm	Dia:110xH:57mm	Dia:135xH:71mm	Dia:135xH:71mm	Dia:160xH:75mm	Dia:160xH:75mm	Dia:160xH:75mm
Voltage	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V	AC160V-245V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Driver	Isolated	Isolated	Isolated	Isolated	Isolated	Isolated	Isolated	Isolated	Isolated	Isolated
Protection	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44
Life Span	50000Hrs									