

FEATURES:

- Recessed mounted LED adjustable downlight / Focusing light

Body

- Made of aluminium, Uv-stabilized, powder coated
- White, Black and Silver finish.

Reflector

- Anodized aluminium

Diffuser

- Clear safety glass

Others

- ◆ Aluminium structured heat sink for better heat dissipation
- ◆ High efficient Epistar LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598


TM-H3011



Model No.	TM-H3011	TM-H3011	TM-H3011	TM-H3011
Power	3W / 5W LED	7W LED	10W LED	12W LED
Type of LED	EPISTAR	EPISTAR	EPISTAR	EPISTAR
Dimension	Dia:75xH:45mm	Dia:85xH:45mm	Dia:100xH:45mm	Dia:100xH:45mm
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Power Factor	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Angle	15/30/45°	15/30/45°	15/30/45°	15/30/45°
Protection	IP44	IP44	IP44	IP44
Life Span	50000Hrs			



Photometric

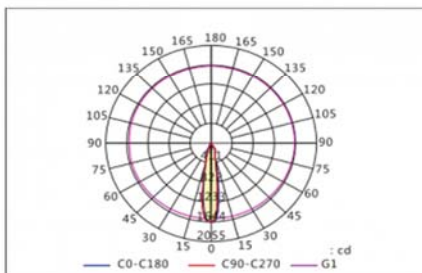

(m)	(lx)	Dh(m)	Dv(m)
1.0	1641.74	0.35	0.34
1.9	474.55	0.65	0.64
3.0	182.42	1.04	1.03
4.0	102.61	1.39	1.37
5.0	65.67	1.74	1.72

H23.7V23.5 H61.7 V61.9



Beam Angle

