



FEATURES:

- Recessed LED wall washer luminaire

Body

- Made of aluminium alloy, Uv-stabilized, powder coated in White, Black finish.

Reflector


- Black aluminium louver for glare free dark lighting distribution.

Others

- ◆ Aluminium structured heat sink for better heat dissipation
- ◆ High efficient Osram LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598



TM-S2010

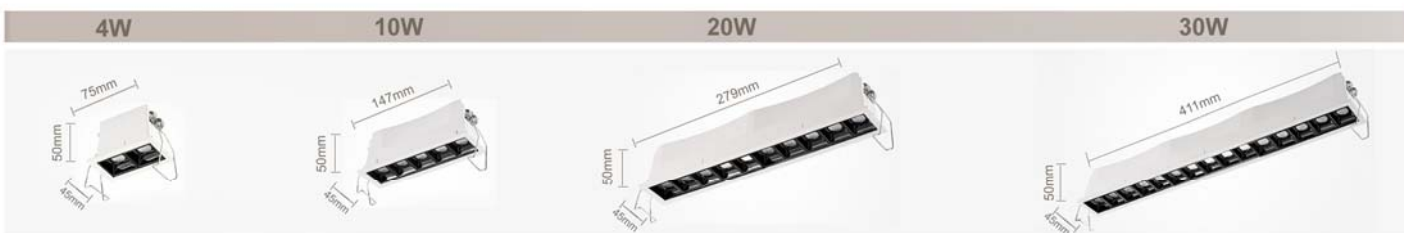

Model No.	TM-S2010	TM-S2010	TM-S2010	TM-S2010	TM-S2010
Power	2W LED	4W LED	10W LED	20W LED	30W LED
Type of LED	Osram	Osram	Osram	Osram	Osram
Dimension	L45xW45xH50mm	L75xW45xH50mm	L147xW45xH50mm	L279xW45xH50mm	L411xW45xH50mm
Voltage	220-240V/60Hz	220-240V/60Hz	220-240V/60Hz	220-240V/60Hz	220-240V/60Hz
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C
Angle	15° / 30° / 45°	15° / 30° / 45°	15° / 30° / 45°	15° / 30° / 45°	15° / 30° / 45°
Drive	Philips	Philips	Philips	Philips	Philips
Protection	IP44	IP44	IP44	IP44	IP44
Life Span			50000Hrs		

