



FEATURES:

- Recessed mounted LED square downlight

Body

- Housing made of sheet steel and die-cast aluminium, Uv-stabilized, powder coated.
- Frame made of die-cast aluminium, Uv-stabilized, powder coated in White, Black, Silver finish.

Diffuser

- Tempered clear glass

Reflector

- Anodized aluminium adjustable angle

Others


- ♦ High efficient CREE LED chip
- ♦ Heat resistant and solid conduct wiring
- ♦ Ideal for Office, Showroom, Hotel etc.
- ♦ European standard of EN 60598




BG444-3




BG444-1

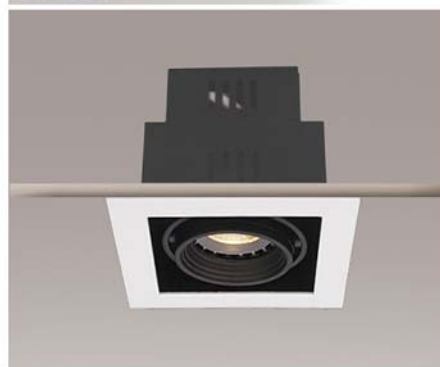


BG444-1



BG444-2



BG444-3



| Model No. | BG444-1 | BG444-2 | BG444-3 |
|------------------|------------------|------------------|------------------|
| Power | 1x5W LED | 2x5W LED | 3x5W LED |
| Type of LED | CREE | CREE | CREE |
| Dimension | L115xW115xH115mm | L210xW115xH115mm | L300xW115xH115mm |
| Voltage | 220-240V/60Hz | 220-240V/60Hz | 220-240V/60Hz |
| Power Factor | >0.95 | >0.95 | >0.95 |
| Color Temp. | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K |
| CRI | ≥80 | ≥80 | ≥80 |
| Luminous Flux | 100LM/W | 100LM/W | 100LM/W |
| Temp. in Working | -20°C +50°C | -20°C +50°C | -20°C +50°C |
| Beam Angle | 15° / 24° / 38° | 15° / 24° / 38° | 15° / 24° / 38° |
| Efficiency | ≥89% | ≥89% | ≥89% |
| Protection | IP44 | IP44 | IP44 |
| Life Span | | 50000Hrs | |