



FEATURES:

- Surface mounted LED aluminium profile
- Stainless Steel Suspended mounting kit

Body

- Made of extruded aluminium
- Powder coated finish (Option)
- White, Black, Grey & Silver

Diffuser

- Prismatic or Opal Polycarbonate

Others

- ◆ Stainless steel mounting clip
- ◆ Built in LED drive (Meanwell)
- ◆ High quality SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598

Available:




IP65





IP67 Version on request

BRAP5532-(**)

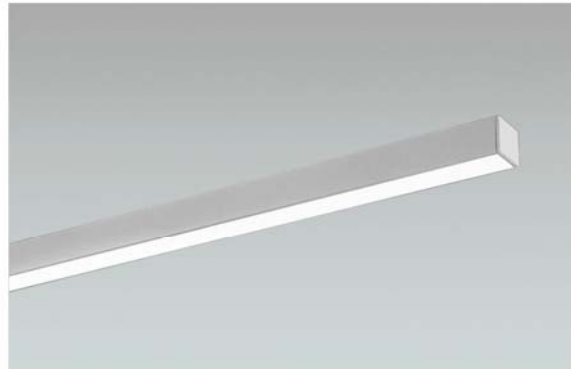


Customade (Max. Length 2500mm)



Model No.	BRAP5532/500	BRAP5532/1000	BRAP5532/1500	BRAP5532(**)
Size	L500xW55xH32mm	L1000xW102xH70mm	L1500xW55xH32mm	L2500xW55xH32mm
Power	7.2 - 14.4W	15 - 28W	30 - 50W	55 - 75W
Type of LED	SMD2835 / 5730 / 5050	SMD2835 / 5730 / 5050	SMD2835 / 5730 / 5050	SMD2835 / 5730 / 5050
Luminous Flux	120LM/W	120LM/W	120LM/W	120LM/W
Color Temp.	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Voltage	AC 100-240V	AC 100-240V	AC 100-240V	AC 100-240V
Power Factor	0.95	0.95	0.95	0.95
Beam Angle	110°	110°	110°	110°
CRI	>80	>80	>80	>80
Working Temp.	-20-40°C	-20-40°C	-20-40°C	-20-40°C
Mounting Method	Surface / Suspended / Recessed / Wall			
Size	(Customade Size & Wattage on request)			
Life	50000Hrs			

ANGLE



Aluminium Profile



Suspension and surface installation kit for one lamp for single run and continuous run



PC Cover



Metal end cap



Metal clip



Suspended