



FEATURES:

- Recessed / Surface mounted LED aluminium profile.
- Stainless Steel Suspended mounting kit

Body

- Made of extruded aluminium
- Powder coated finish (Option)
- White, Black, Grey & Silver

Diffuser

- Prismatic or Opal Polycarbonate

Others

- ◆ Stainless steel mounting clip
- ◆ High quality SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598

Available:




IP40





IP65 Version on request


BRMK**

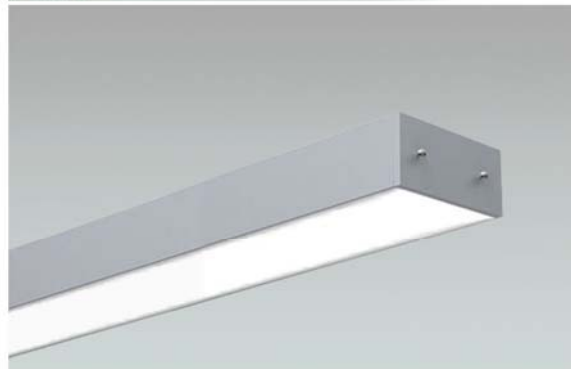

Customade (Max. Length 3000mm)



Model No.	BRMK10075/(**)	BRMK15085/(**)	BRMK20085/(**)
Size	L1000xW100xH75mm	L1000xW150xH85mm	L1000xW200xH85mm
Power	10 - 60W	20 - 80W	20 - 100W
Type of LED	SMD2835 / 5730 / 5050	SMD2835 / 5730 / 5050	SMD2835 / 5730 / 5050
Luminous Flux	120LM/W	120LM/W	120LM/W
Color Temp.	2700-6500K	2700-6500K	2700-6500K
Voltage	AC 100-240V	AC 100-240V	AC 100-240V
Power Factor	0.95	0.95	0.95
Beam Angle	110°	110°	110°
CRI	>80	>80	>80
Working Temp.	-20-40°C	-20-40°C	-20-40°C
Mounting Method	Surface / Suspended / Recessed / Wall		
Size	(Customade Size & Wattage on request)		
Life	50000Hrs		

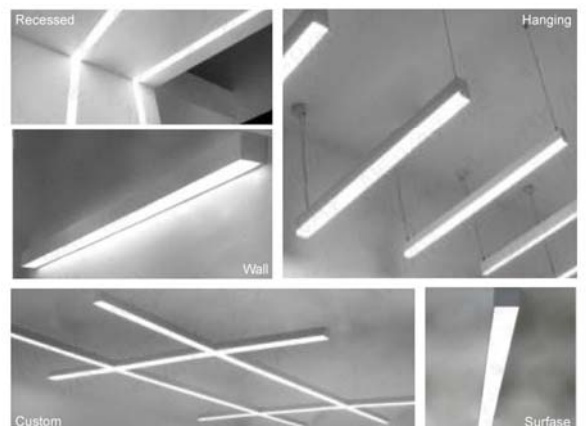

Aluminium Profile



Suspended and surface installation kit for one lamp for single run and continuous run



Rece. installation kit for one lamp for single run and continuous run



Plastic end cap



Metal clip