



FEATURES:

- Recessed mounted downlight
- COB LED chip by CREE / PHILIPS

Body

- Made of die-cast aluminium with polyester powder coated.
- White, Silver, Black finish

Diffuser

- Protective thermal shock resistant lens

Reflector

- Anti-glare reflector

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598




Available:



3000K	3500K	4000K	4500K	5000 - 5500K	6000 - 6500K
-------	-------	-------	-------	--------------	--------------



TM-R8307-()**

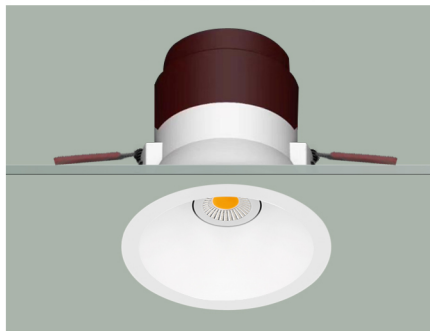

TM-S8307-()**

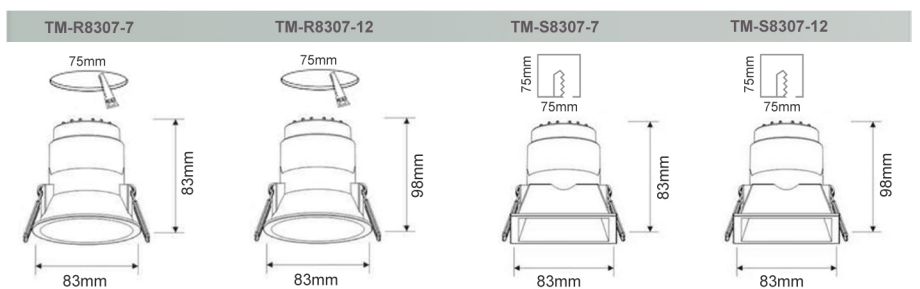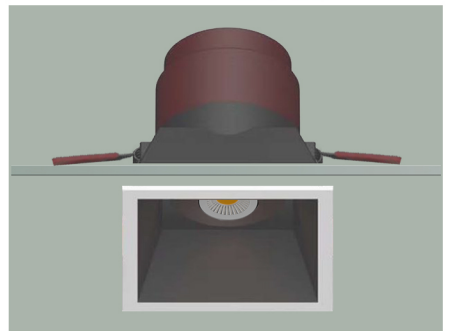

Model No.	TM-R8307-7	TM-R8307-12	TM-S8307-7	TM-S8307-12
Power	7W LED	12 LED	7W LED	12W LED
LED Type	CREE - PHILIPS	CREE / PHILIPS	CREE / PHILIPS	CREE / PHILIPS
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥90	≥90	≥90	≥90
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	15°/ 24°/ 36°	15°/ 24°/ 36°	15°/ 24°/ 36°	15°/ 24°/ 36°
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Protection	IP44	IP44	IP44	IP44
Dimension	83x83x83mm	83x83x98mm	83x83x83mm	83x83x98mm
Life Span	50000Hrs			