



FEATURES:

- Recessed mounted anti-glare downlight
- COB LED chip by CREE

Body

- Made of die-cast aluminium with surface powder coated in White & Silver finish.

Diffuser

- Polycarbonate


Reflector

- Anodized aluminium

Others

- ◆ Efficient heat sink
- ◆ High quality built in drive
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Museum, Showroom, Public facilities.
- ◆ European standard of EN 60598

Beam Angle

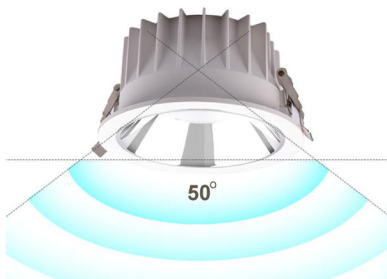

Available:

3000K	3500K	4000K	4500K	5000 - 5500K	6000 - 6500K
-------	-------	-------	-------	--------------	--------------



TM-D005RO




TM-D005SQ




Model No.	TM-D005RO / TM-D005SQ				
Power	7W / 10W LED	15W / 20W LED	25W / 30W LED	40W LED	50W LED
LED Type	CREE - COB	CREE - COB	CREE - COB	CREE - COB	CREE - COB
Dimension	115x115x65mm	140x140x80mm	160x160x85mm	198x198x98mm	230x230xmm
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	50°	50°	50°	50°	50°
Protection	IP54	IP54	IP54	IP54	IP54
Dimmable	TRIAC/0-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)				
Life Span	50000Hrs				


7W / 10W




15W / 20W



25W / 30W



40W



50W

