



FEATURES:

- Surface mounted LED Mirror light
- SMD LED chip by Philips / Epistar

Body

- Made of aluminium with powder coated White, black and Silver finish.

Diffuser

- Acrylic, Uv-stabilized

Others

- ◆ Built-in electronic drive
- ◆ High efficient SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Wash area, Toilet, Bathroom
- ◆ European standard of EN 60598



Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K




ML7830-()**



PHOTOMETRIC VIEW

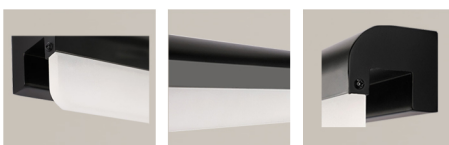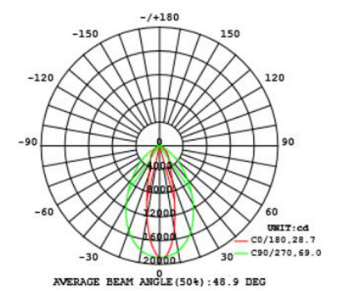

ML7830-09 ML7830-12 ML7830-14 ML7830-16 ML7830-28

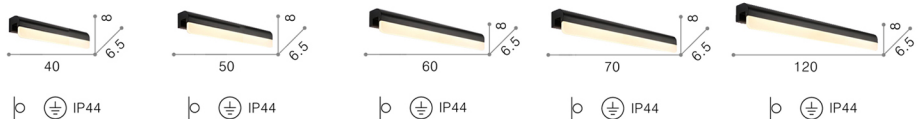

Model No.	ML7830-09	ML7830-12	ML7830-14	ML7830-16	ML7830-28
Power	9W LED	12W LED	14W LED	16W LED	28W LED
LED Type	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Dimension	L:400xH:80mm	L:500xH:80mm	L:600xH:80mm	L:700xH:80mm	L:1200xH:80mm
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.95	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	120°	120°	120°	120°	120°
Protection	IP44	IP44	IP44	IP44	IP44
Dimmable	TRIAC/0-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)				
Life Span	50000Hrs				