



FEATURES:

- Surface mounted downlight
- COB Chip: CREE, Osram, Philips
- Drive: Meanwell, Osram, Philips

Body

- Made of die-cast aluminium with surface powder coated.
- Black, White, Grey, Chrome finish

Diffuser


- Tempered glass, thermal shock resistant

Reflector

- Anodized aluminium with glare control

Others


- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598



TM300CL



TM300HL

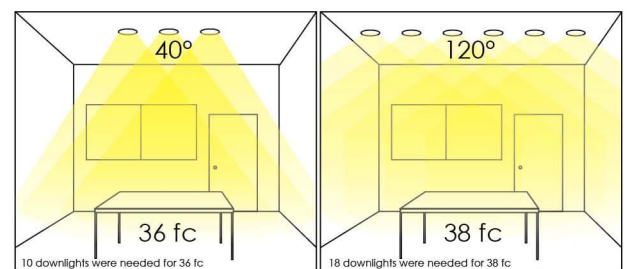

Model No	Power	Voltage	LED	Lumen	Ra	Color	Size	Beam angle
TM300CL TM300HL	10W/15W	200-240V	CREE PHILIPS	1200lm	80/90/97	2700-5000k	φ76*H150mm	15°/24°/38°
TM300CL TM300HL	15W/20W	200-240V	CREE PHILIPS	1600lm	80/90/97	2700-5000k	φ96*H150mm	15°/24°/38°
TM300CL TM300HL	25W	200-240V	CREE PHILIPS	2000lm	80/90/97	2700-5000k	φ116*H150mm	15°/24°/38°
TM300CL TM300HL	30W	200-240V	CREE PHILIPS	2400lm	80/90/97	2700-5000k	φ142*H160mm	15°/24°/38°
TM300CL TM300HL	40W	200-240V	CREE PHILIPS	3200lm	80/90/97	2700-5000k	φ171*H180mm	15°/24°/38°
TM300CL TM300HL	50W	200-240V	CREE PHILIPS	4000lm	80/90/97	2700-5000k	φ206*H215mm	15°/24°/38°
TM300CL TM300HL	40W	200-240V	CREE PHILIPS	3200lm	80/90/97	2700-5000k	φ171*H198mm	45°
TM300CL TM300HL	50W	200-240V	CREE PHILIPS	4000lm	80/90/97	2700-5000k	φ186*H214mm	45°