



FEATURES:

- Recessed mounted downlight
- SMD LED chip by Osram / Philips

Body

- Made of die-cast aluminium with surface powder coated after epoxy painting.
- White, Black, Chrome finish

Diffuser

- Tempered clear / frosted diffuser

Reflector

- Anodized aluminium reflector in white, silver, black

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient SMD LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598



Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K



TM-BT631



Beam Angle

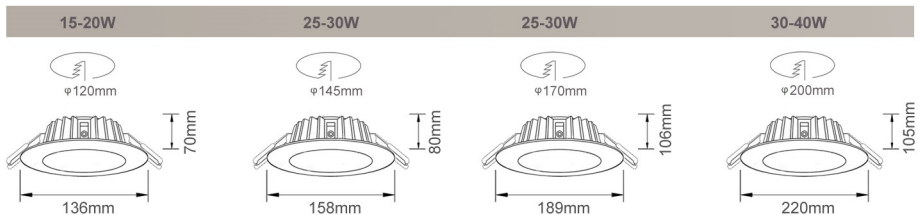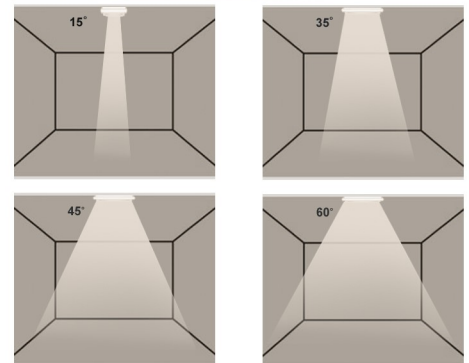

Model No.	TM-BT631					
Power	10-12W LED	12-15W LED	15-20W LED	20-25W LED	25-30W LED	30-40W LED
LED Type	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips
Dimension	Dia: 95x95x53mm	Dia: 115x115x63mm	Dia: 136x136x70mm	Dia: 158x158x80mm	Dia: 189x189x106mm	Dia: 220x220x105mm
Voltage	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	15 / 30 / 45 / 60°	15 / 30 / 45 / 60°	15 / 30 / 45 / 60°	15 / 30 / 45 / 60°	15 / 30 / 45 / 60°	15 / 30 / 45 / 60°
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Protection	IP54	IP54	IP54	IP54	IP54	IP54
Drive	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips	Osram / Philips
Life Span	50000 - 60000Hrs					