



FEATURES:

- Recessed mounted trimless downlight
- COB LED chip by Bridgelux, CREE

Body

- Made of die-cast aluminium with polyester powder coated.
- Black, White and Silver finish

Diffuser

- Tempered glass, thermal shock resistant

Reflector

- Anodized aluminium

Others


- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dalli / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for interior lighting
- ◆ European standard of EN 60598



BFL1022-(**)



Photometric Data





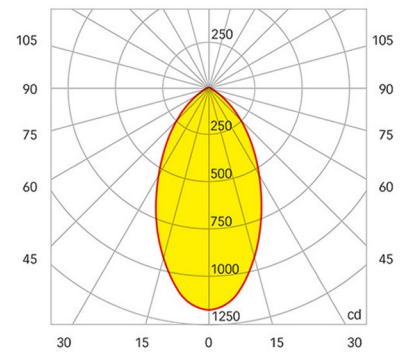


BFL1022-6W

BFL1022-9W

BFL1022-15W

BFL1022-18W

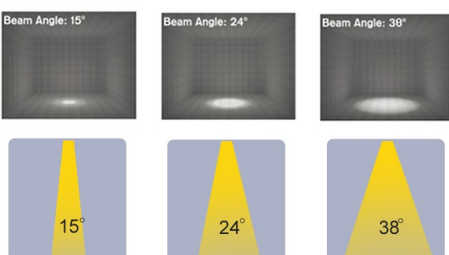

Model No.	BFL1022-6W	BFL1022-9W	BFL1022-15W	BFL1022-18W
Power	6W LED	9W LED	15W LED	18W LED
LED Type	COB	COB	COB	COB
Dimension	Dia:55xH:120mm	Dia:75xH:106mm	Dia:91xH:120mm	Dia:128xH:130mm
Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Power Factor	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥90	≥90	≥90	≥90
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	15/24/38°	15/24/38°	15/24/38°	15/24/38°
Protection	IP44	IP44	IP44	IP44
Dimmable	TRIAC/1-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)			
Life Span	50000Hrs			