



### FEATURES:

Recessed mounted LED Panel light  
Suitable for Dampa aluminium false ceiling

### BODY

Housing made of galvanized sheet steel white with PS coating,  
Frame made of extruded aluminium in white, grey and natural aluminium finish.

### Diffuser

Uv-stabilized, anti yellowing, prismatic PS diffuser  
with thermal shock resistant.

### Reflector



Sheet steel white with PS coating

### Others

- Aluminium mounting bracket for easy installation
- Brilliant lighting effect with high efficiency
- Dimmable Dalli / TRIAC 0 - 10V Available on request (Maximum Wattage: 80W)
- Heat resistant and solid conductor terminal connector
- High quality electronic drive
- Ideal for interior installation
- European standard of EN 60598








### BTP6060

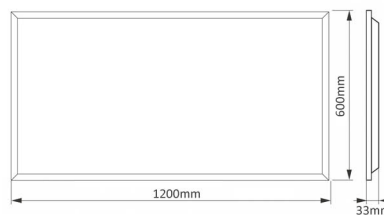

Model No.	BTP3030	BTP3060	BTP6060	BTP30120	BTP60120
Type of LED	SMD	SMD	SMD	SMD	SMD
Power	20W	30W	40W/44W/48W/50W/60W	36W/44W	60W/80W
Input Voltage	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz	AC220-240V/50-60Hz
Power Factor	>95	>95	>95	>95	>95
Color Temp.	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80
Beam Angle	120°	120°	120°	120°	120°
Luminous Flux	100-120LM/W	100-120LM/W	100-120LM/W	100-120LM/W	100-120LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Driver	Isolated	Isolated	Isolated	Isolated	Isolated
Protection	IP54	IP54	IP54	IP54	IP54
Size	300x300x33mm	300x600x33mm	600x600x33mm	300x1200x33mm	600x1200x33mm
Life Span			50000Hrs		


### Hanging Accessories (Order Code: SK10)



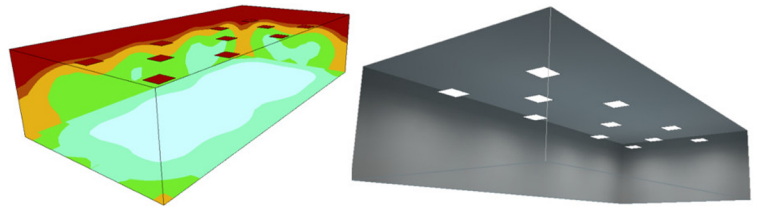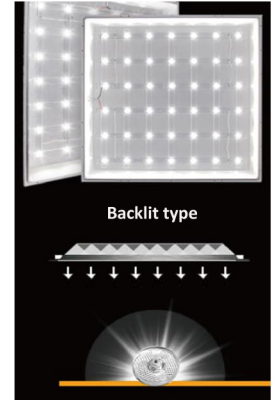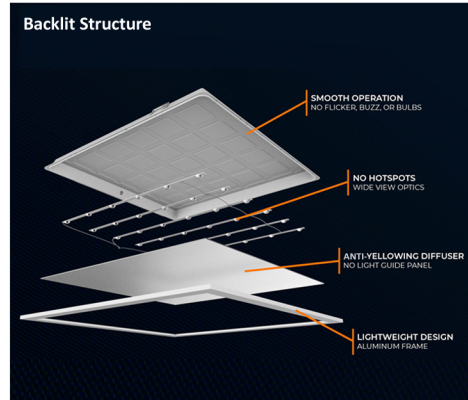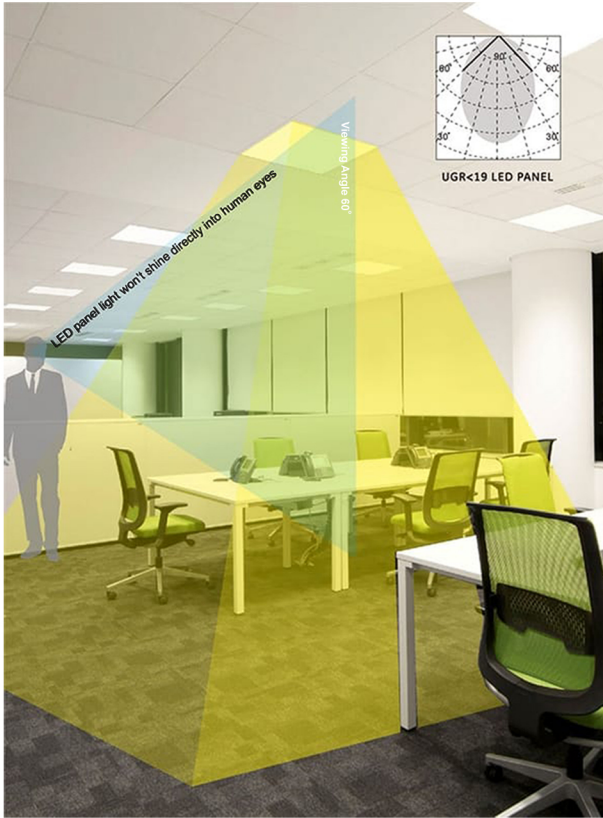


Lighting designs showing light distribution when using 600x600 LED panels

**Dimension**

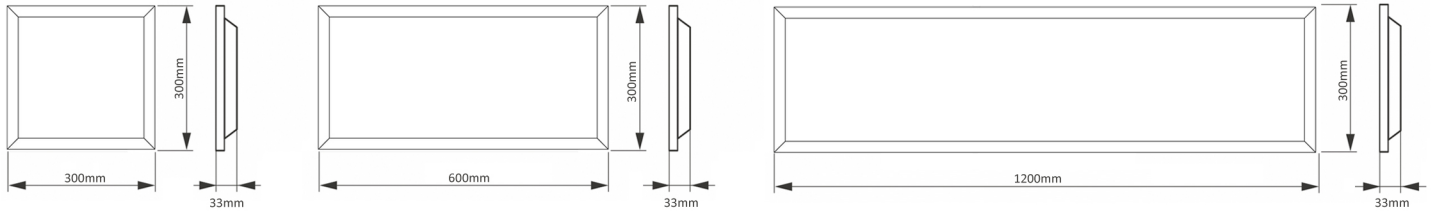


**Installation**

1. Spring Embedded: (Dampa Ceiling)

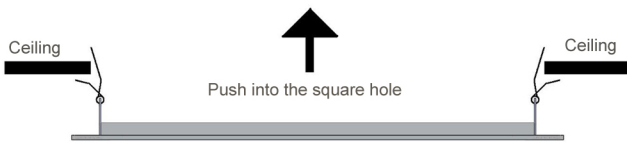


2. Suspending: Use the special Accessories

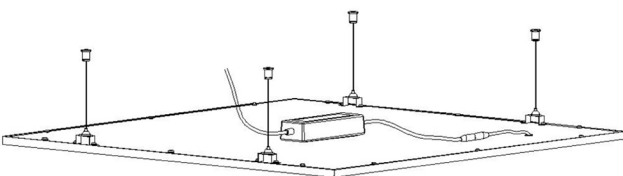

**Wiring Diagram**

3. Emergency Battery Pack (Option)

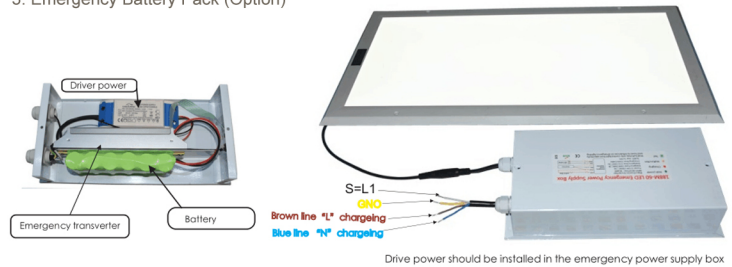

4. Recessed (Lay-in Ceiling)

