



FEATURES:

- Recessed mounted waterproof LED Downlight
- COB LED chip by CREE / PHILIPS

Body

- Made of die-cast aluminium with surface powder coated.
- White, Black, Silver, Chrome, Gold finish

Diffuser

- Tempered clear or frosted glass

Reflector

- Anodized aluminium, white, black, chrome, gold finish

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dali / TRIAC 1 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for wet areas
- ◆ European standard of EN 60598


Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K

IP65 **CE** **NOM**

BFL1026




BFL1028

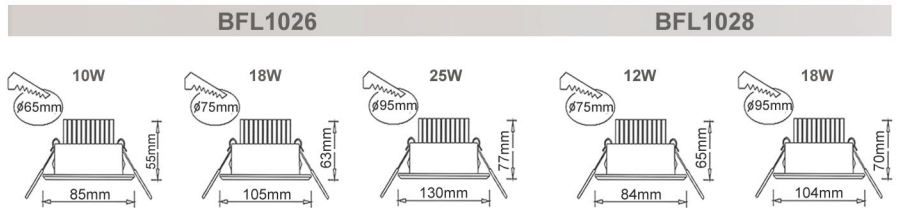


COB LED CHIP BY CREE / PHILIPS




Model No.	BFL1026-10W	BFL1026-18W	BFL1026-25W	BFL1028-12W	BFL1028-18W
Power	10W LED	18W LED	25W LED	12W LED	18W LED
LED Type	CREE	CREE	CREE	CREE	CREE
Dimension	Dia: 85xH55mm	Dia: 105xH63mm	Dia: 130xH77mm	Dia: 84xH65mm	Dia: 104xH70mm
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥90	≥90	≥90	≥90	≥90
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	20°/ 40°	20°/ 40°	20°/ 40°	15°/ 24°/ 45°	15°/ 24°/ 45°
Driver	Philips	Philips	Philips	Philips	Philips
Dimmable	TRIAC/1-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)				
Life Span	50000Hrs				

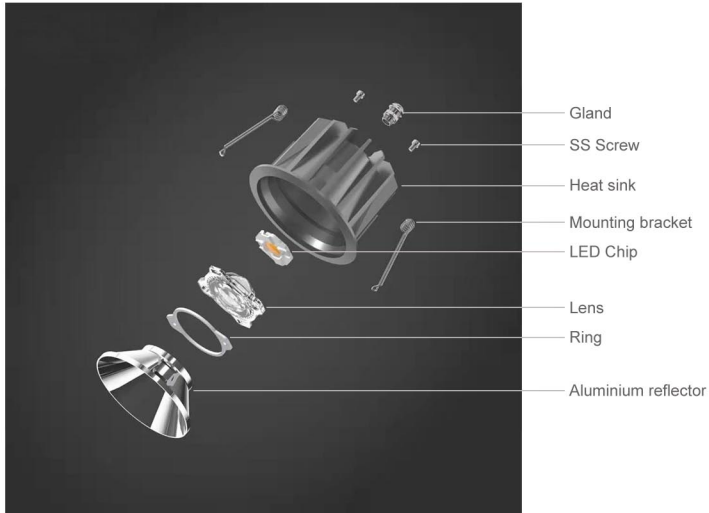

Model: BFL1026



Model: BFL1028

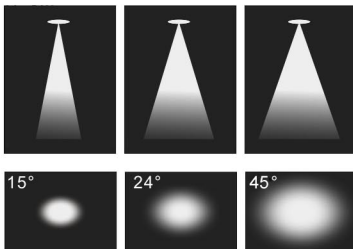

Photometric Data

