



FEATURES:

- Recessed mounted downlight
- SMD LED chip by CREE / OSRAM

Body

- Made of die-cast aluminium with surface powder coated.
- Black, White finish

Diffuser


- Opal Polycarbonate, thermal shock resistant

Reflector

- Anodized aluminium with glare control

Others

- ◆ Aluminium structured heat sink
- ◆ High efficient SMD LED chip
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office and balcony
- ◆ European standard of EN 60598

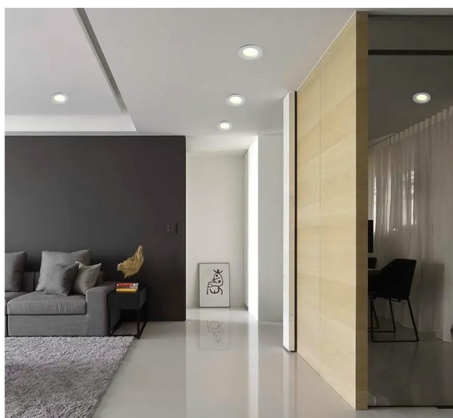



Available: 3000K 3500K 4000K 4500K 5000 - 5500K 6000 - 6500K



BFL2002



Installation

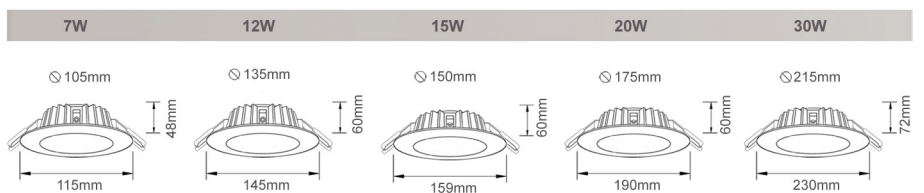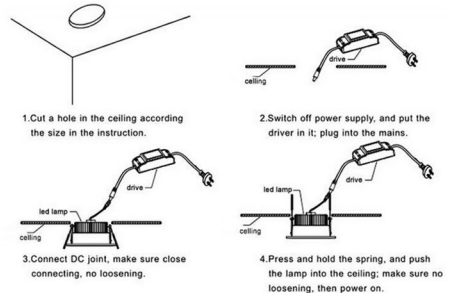

Model No.	BFL2002				
Wattage	7W LED	12W LED	15W LED	20W LED	30W LED
LED Type	SMD	SMD	SMD	SMD	SMD
Dimension	Dia: 115xH: 48mm	Dia: 145xH: 60mm	Dia: 159xH: 60mm	Dia: 190xH: 60mm	Dia: 230xH: 72mm
Voltage	AC220V-240V	AC220V-240V	AC220V-240V	AC220V-240V	AC220V-240V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Protection	IP54	IP54	IP54	IP54	IP54
Dimmable	TRIAC/0-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)				
Life Span	50000Hrs				
Remarks	IP65 Version available on request.				