



FEATURES:

- Recessed mounted LED Downlight
- COB LED chip by Philips / CREE / Osram

Housing

- Body made of die-cast aluminium with surface powder coated epoxy painting.
- Trim made of die-cast aluminium in white, silver, black finish.

Diffuser

- Tempered clear glass

Reflector

- Anodized aluminium reflector in white, silver, black

Others



- ◆ Aluminium structured heat sink
- ◆ High efficient COB LED chip
- ◆ Dimmable Dali / TRIAC 0 - 10V Available on request
- ◆ Heat resistant and solid conduct wiring
- ◆ Ideal for Office, Public areas
- ◆ European standard of EN 60598



TM-D7055



Beam Angle

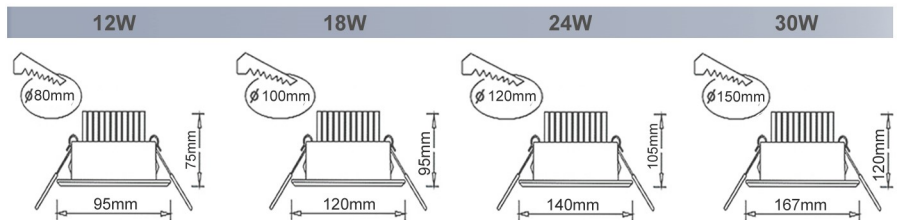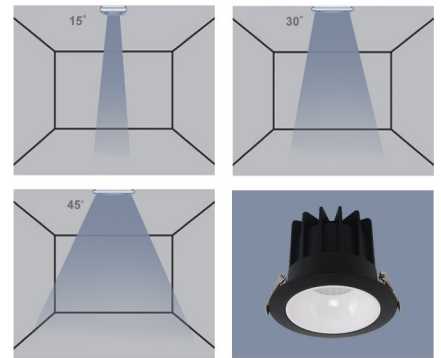

Model No.	TM-D7055	TM-D7055	TM-D7055	TM-D7055	TM-D7055	TM-D7055	TM-D7055
Power	7W LED	12W LED	18W LED	24W LED	30W LED	40W LED	60W LED
LED Type	PHILIPS / CREE / OSRAM						
Dimension	Dia:70xH:55mm	Dia:95xH:75mm	Dia:120xH:95mm	Dia:140xH:105mm	Dia:167xH:120mm	Dia:197xH:140mm	Dia:236xH:165mm
Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	15/30/45°	15/30/45°	15/30/45°	15/30/45°	15/30/45°	15/30/45°	15/30/45°
Protection	IP44	IP44	IP44	IP44	IP44	IP44	IP44
Driver	PHILIPS / TRIDONIC / OSRAM						
Dimmable	TRIAC/0-10V/PWM/Dali Dimmable (Order code = / Dali Dim / PWM Dim)						
Life Span	50000Hrs						